


EC Transfer Switch Fire Pump Controller


MASTER

Short Circuit Current Rating	Maximum Horsepower				
	200/208	220/240	380/415	440/480	550/600
100,000A	150	200	350	400	400

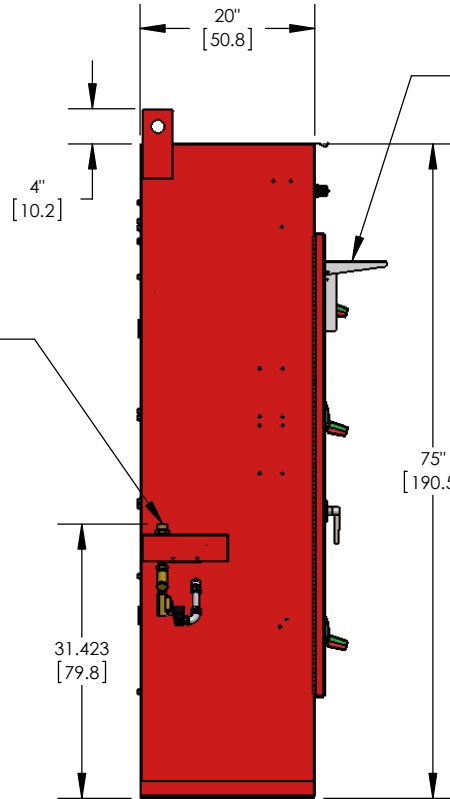

1/2" (13mm) Female N.P.T. Nominal (Trade Size) American Std. Tapered Pipe Thread


DISPLAY SHIELD ONLY AVAILABLE ON NEMA 3R AND 4 CONTROLLERS

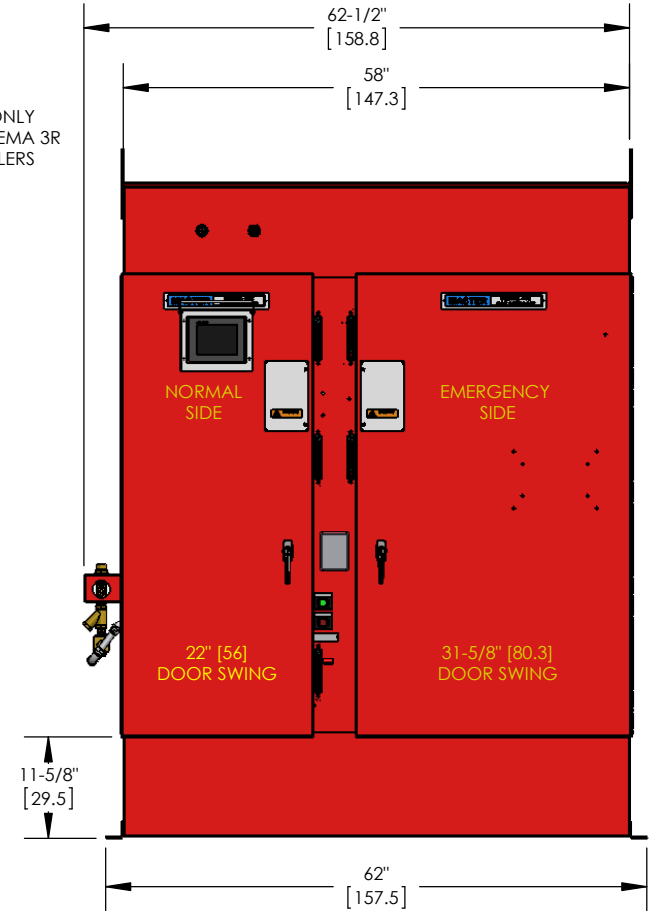

Notes:

- Construction:** NEMA Type 2, 12, 3R and 4
- Finish:** Fire Pump Red
- Conduit Entrance:** Conduit Entry on Top or Bottom. Protect Equipment from Drilling Chips
- Conduit Hubs:** Waterproof Hubs Required for Top Entry
- Access:** Front
- Mounting:** Floor Mount
- Shipping Weight:** 1300 Lbs. (589.7 kg) Max.

Dimensions In Inches and [Centimeters]

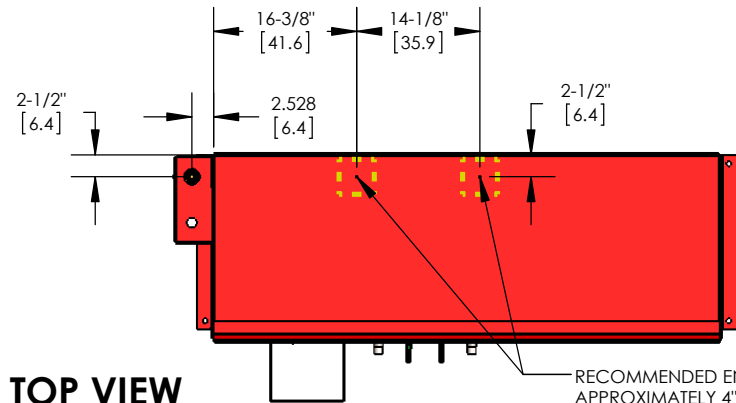

TOP VIEW

RECOMMENDED ENTRY LOCATIONS APPROXIMATELY 4" AREA

(4) Ø9/16" (14 mm) Mounting Holes

RECOMMENDED CONDUIT ENTRY AREA AT BOTTOM OF CONTROLLER. AREA IS APPROX 8-1/4" x 17-1/4"

