

MC Transfer Switch Fire Pump Controller

MASTER

Short Circuit Current Rating	Maximum Horsepower				
	200/208	220-240	380/415	440-480	550-600
100,000A	100/125	125	200/250	250	350






1/2" (13mm) Female N.P.T.
Nominal (Trade Size)
American Std. Tapered
Pipe Thread


Notes:

- Construction:** NEMA Type 2, 12, 3R and 4
- Finish:** Fire Pump Red
- Conduit Entrance:** Conduit Entry on Top or Bottom. Protect Equipment from Drilling Chips
- Conduit Hubs:** Waterproof Hubs Required for Top Entry
- Access:** Front
- Mounting:** Floor Mount
- Shipping Weight:** 1300 Lbs. (589.7 kg) Max.

Dimensions In Inches and [Centimeters]

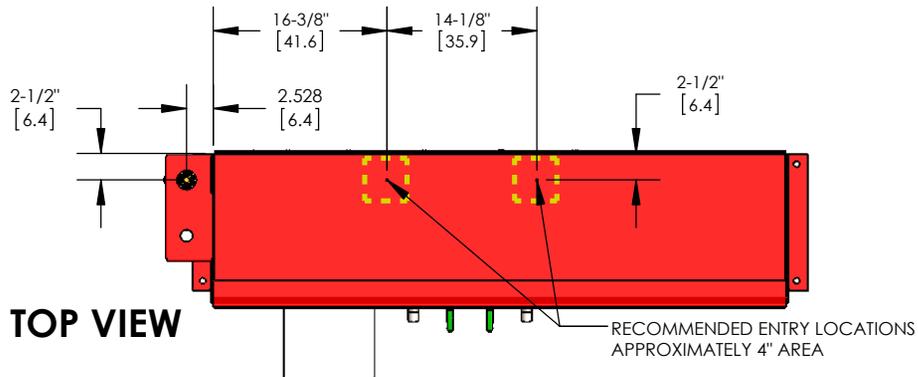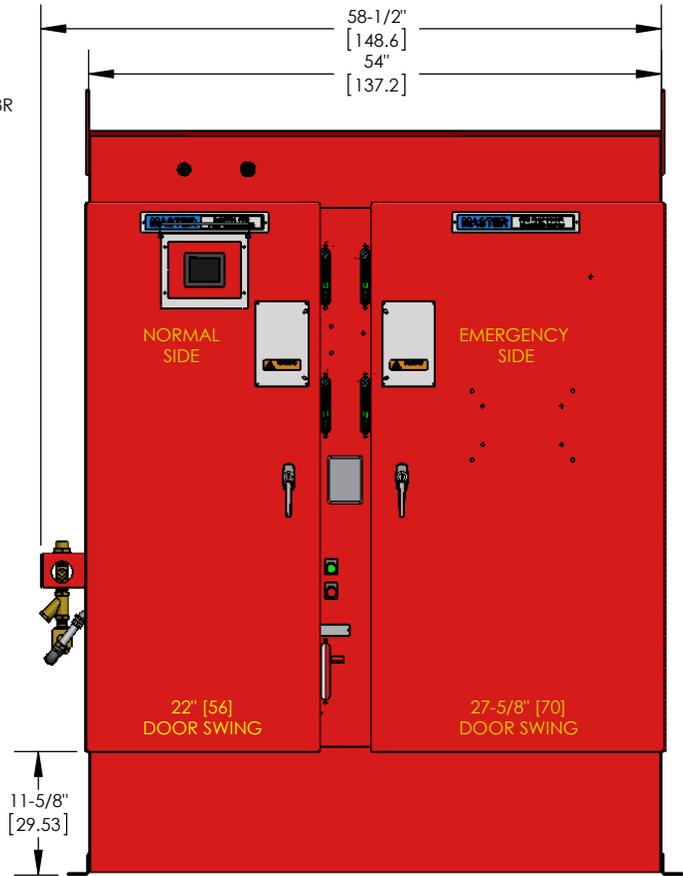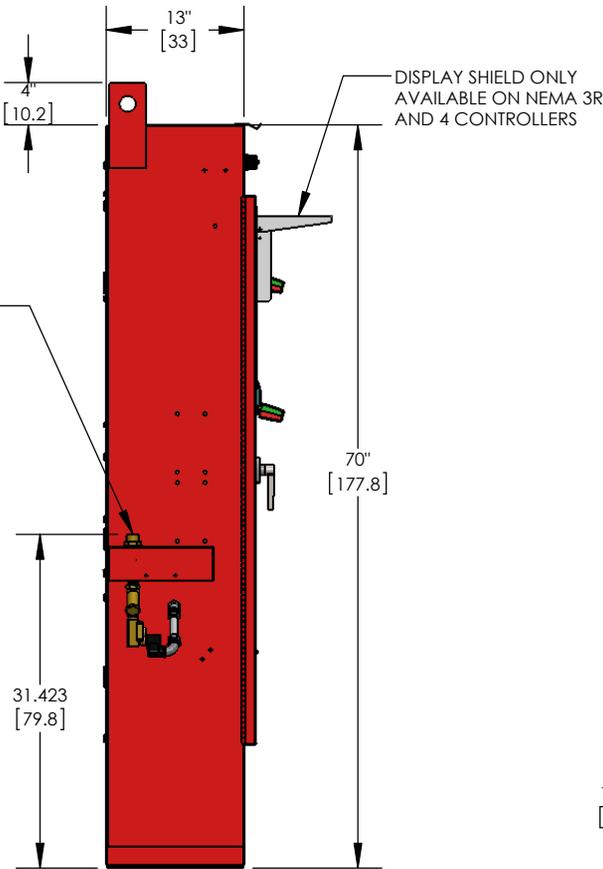

RECOMMENDED CONDUIT ENTRY AREA AT BOTTOM OF CONTROLLER. AREA IS APPROX 8-1/4" x 17-1/4"

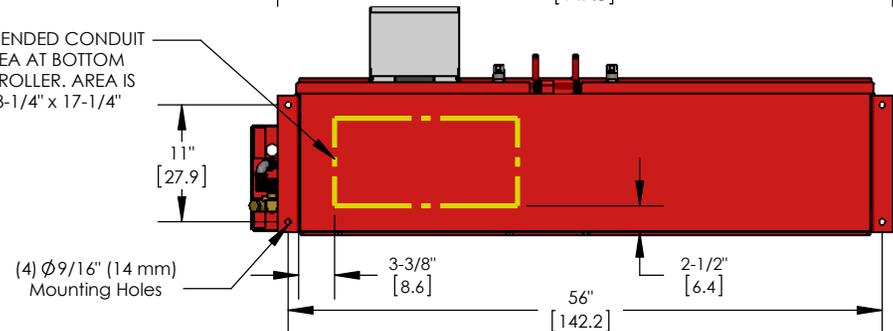

TOP VIEW