


ISSUE	SUMMARY		
1	INITIAL ISSUE	<i>P</i>	24 MAY 07
2	DC-EIF TERMS.	<i>P</i>	22 JUN 09

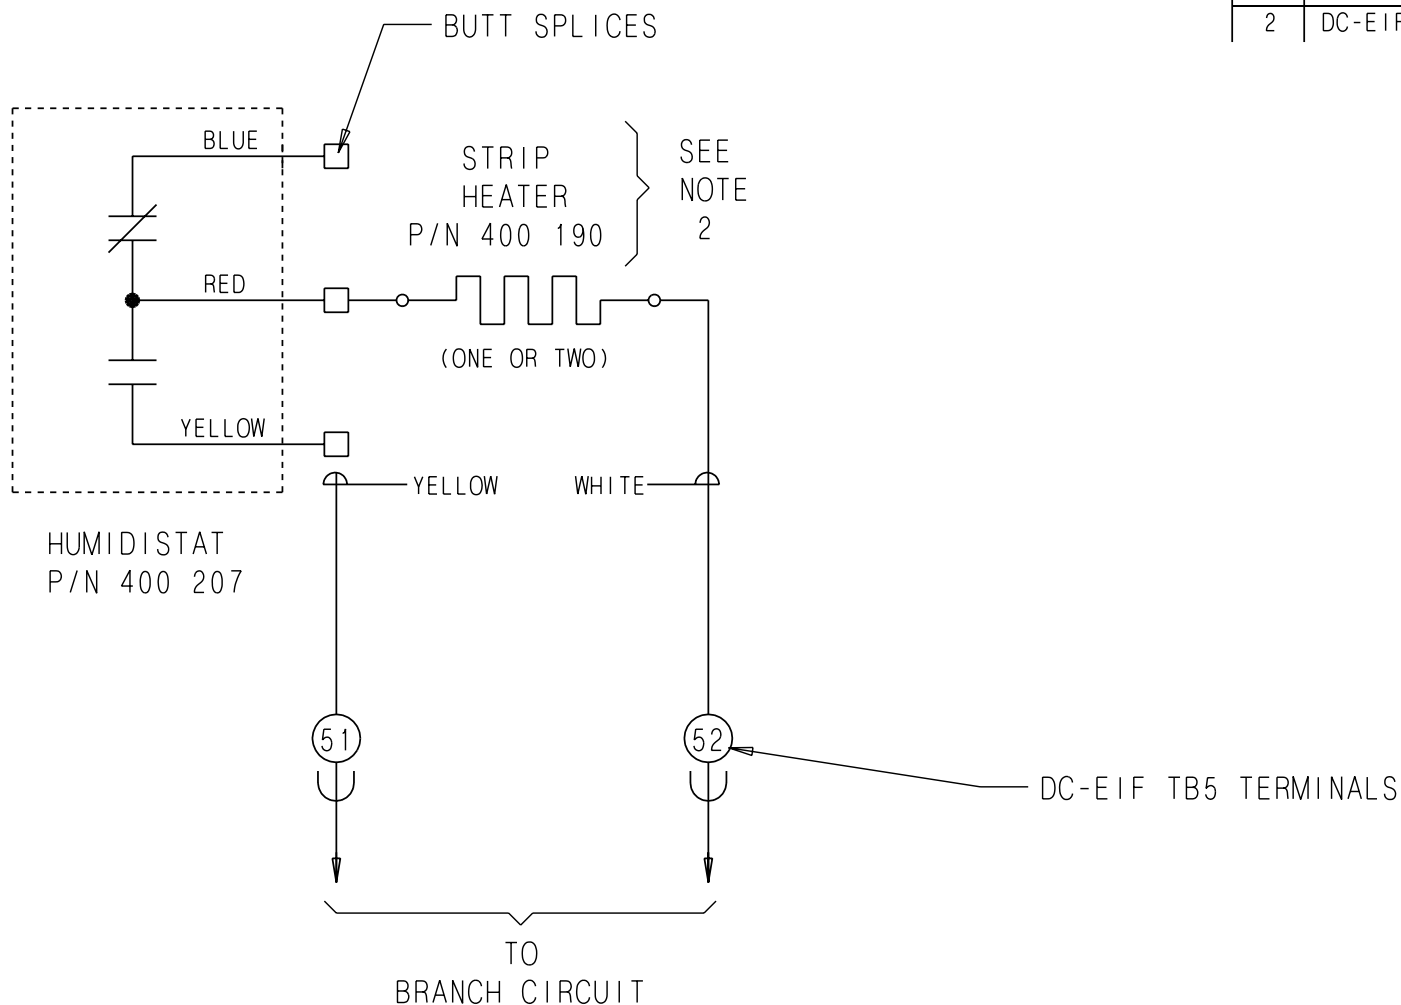

NOTES:

1. SEE ENGINE CONTROLLER SCHEMATIC DIAGRAM FOR CONTROLLER DETAILS.
2. STRIP HEATERS RATED 150 WATTS AT 230 V.A.C. FACTORY CONNECTED IN CONTROLLER TO INTERNAL 115 V.A.C. SOURCE TO YIELD 37.5 WATTS.
3. FOR 220 THRU 240 VAC CONTROLLERS, TWO STRIP HEATERS ARE FACTORY WIRED IN SERIES WHICH YIELDS 75 WATTS.

WIRING DIAGRAM			
STRIP HEATER & HUMIDISTAT			
SERIES DEC CONTROLLERS			
	MASTER CONTROL SYSTEMS INC.		
	LAKE BLUFF, ILLINOIS U.S.A.		
USED ON		RELOT	22 JUN 09
DRN.	<i>P</i>	DES.	
APP.		DATE	24 MAY 07
DWG.	17624	ISS. 2	SHEET 1 OF 1