

MASTER

Model PMC - Pressure Maintenance Pump Controllers

MASTER LIST PRICES
August 1, 2010 Rev. A

Customer Service
(847) 295-1010
sales@mastercontrols.com



The basic model PMC consists of a horsepower rated disconnect switch with rotary operator, fuses and fuse blocks, magnetic motor starter, 300 PSI pressure switch with a 10 psi fixed differential and setting dial, 1/2 inch female NPT fitting, and a MANUAL-OFF-AUTO selector switch in a NEMA 2 rated enclosure.

MODEL PMC - PRESSURE MAINTENANCE CONTROLLER

Maximum Motor Horsepower	Motor Rated Voltage					
	Single Phase		Three Phase			
	110-120V	220-240V	200-208V	220-240V	380-415V (50 Hz)	440-600V*
1/3 to 2	\$850	\$850	\$860	\$860	\$860	\$860
3	\$1,360	\$850	\$860	\$860	\$860	\$860
5		\$1,360	\$860	\$860	\$860	\$860
7.5		\$1,360	\$860	\$860	\$860	\$860
10			\$1,370	\$1,370	\$860	\$860
15				\$1,370	\$1,370	\$1,370
20					\$1,370	\$1,370
25					\$1,370	\$1,370
30					\$1,800	\$1,800

* Units over 480V must be ordered with option 1, control power transformer.

CONTROLLER OPTIONS

Symbol	Description	List Price
1	Control Power Transformer	\$80
2	Minimum Run Timer	\$170
3	Spare Line Fuses	\$70
4	Restart Time Delay	\$170

ENCLOSURE

Symbol	Description	List Price
E3R	NEMA 3R raintight, weatherproof enclosure	\$260
E12	NEMA 12 dusttight, driptight enclosure	\$260
E4	NEMA 4 watertight enclosure	\$1,290
E4XB	NEMA 4X corrosion resistant, watertight enclosure (304 SS)	Quote
E4XC	NEMA 4X corrosion resistant, watertight enclosure (316 SS)	Quote

ALARM LIGHTS & CONTACTS

Symbol	Description	List Price
A1	One N.O. and one N.C. pump running contact	\$120
A2	Two N.O. and two N.C. pump running contacts	\$230
A3	One N.O. and one N.C. power available/failure contact	\$310
A4	Two N.O. and two N.C. power available/failure contacts	\$420
F1	Failure to start contacts	\$230
L1	Indicating pilot light	\$160

MASTER LIST PRICES
Effective: August 1, 2010


Customer Service
(847) 295-1010
sales@mastercontrols.com



MISCELLANEOUS

<i>Symbol</i>	<i>Description</i>	<i>List Price</i>
C1	Circuit breaker in place of fusible disconnect switch (AIC: 18,000A @ 200-240V; 14,000A @ 440-600V)	\$550
H2	Space heater with thermostat (Option #1 must also be ordered)	\$420
H3	Space heater with humidistat (Option #1 must also be ordered)	\$420
M1	Run time meter (Option #1 must also be ordered)	\$170
M2	Operations counter (Option #1 must also be ordered)	\$170
NY	New York City approvals	\$160
R1	Additional control relay	\$160
RA	External Overload Reset	\$190
S1	Service entrance rating	\$160
T1	Additional timing relay	\$320
W1	316 SS wetted parts	\$360
W7	High-pressure wetted parts (500 PSI - 15 psi fixed differential)	\$360

Ordering Number Example:

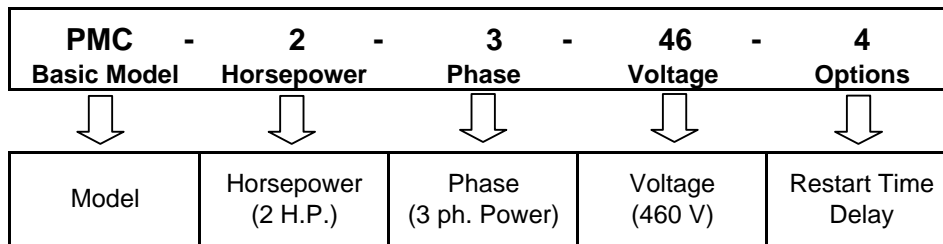

When ordering a Master Pump Motor Controller, please specify the following to ensure prompt delivery:		
Complete Model Number	Motor Horsepower	Motor Voltage & Frequency
Optional Equipment	Withstand Rating	Special Modifications